



PB3000 Parking Barrier

ZK Parking Barrier is a product which ZKTeco owns the independent intellectual property rights. Its boom prevents unauthorized vehicles entering restricted area, and can be raised by the remote control, access control system, and long-distance reader. If a loop detector is installed, impact can be avoided. The boom will be automatically lowered after the vehicle passes through the gate; otherwise, the boom can be lowered manually by using a remote controller or press button.

The parking barrier can be equipped with photo cell. When people / vehicle obscure the infrared launched from photo cell, boom will be stopped and then raised during lowering. After people / vehicle leave, the boom will be automatically lowered. With the Boom illuminator system, light turns green when boom is raised and turns red when boom is lowered. It help driver to determine the position of boom and avoid hitting the boom.


Features

- Compact design, convenient for packing and lowering delivery cost;
- ZK designed rolling pressure spring technology, extending product life;
- Boom can be raised and lowered smoothly and steadily;
- Convenient for maintenance and customization;
- Simple installation – just fix the barrier on floor and connect it to electricity.

Specifications

Model No.	PB3010L/R	PB3030L/R	PB3060L/R
Lane Width	3M	4.5 M	6 M
Opening / Closing Time	1.8S	35	65
Supply Voltage	110V AC or 220V AC	110V AC or 220V AC	110V AC or 220V AC
Power Consumption Max.	200W	200W	200W
Frequency	50-60Hz	50-60Hz	50-60Hz
Cabinet Material	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel
Boom Material	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy
Base Frame	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy
Temperature Range	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
Humidity Range	≤90%	≤90%	≤90%
Ingress Protection	IP54	IP54	IP54
Housing Dimensions (W x D x H)	300 * 280 * 980 (mm)	300 * 280 * 980 (mm)	300 * 280 * 980 (mm)
Packing Dimensions (W x D x H)	460 * 420 * 1150 (mm)	460 * 420 * 1150 (mm)	460 * 420 * 1150 (mm)
Net Weight (Without Boom)	56KG	56KG	56KG
Gross Weight (Without Boom)	72KG	72KG	72KG

Dimension

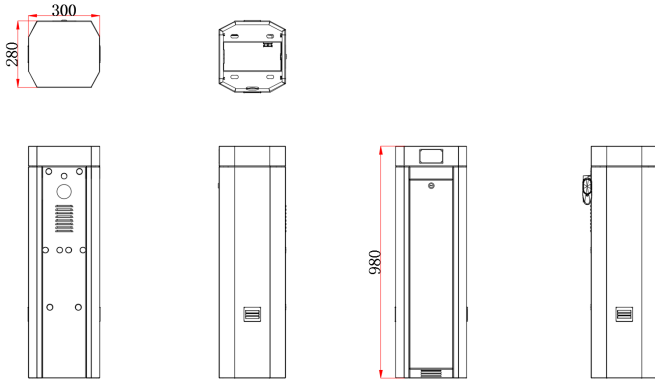



Accessories

Loop detector Photo Cell Siren
 Remote Transmitter Loop

Optional Functions

Heater system Cooling system
 Boom illuminator system
 Wooden Package
 Controller(C3-100 or inBIO160)

Typical Installation

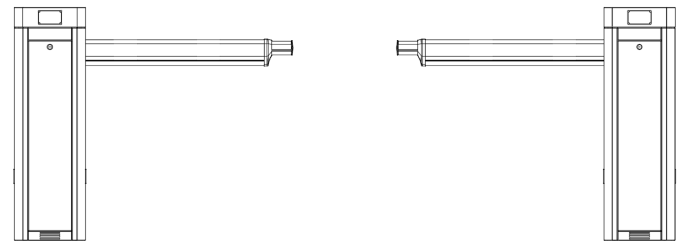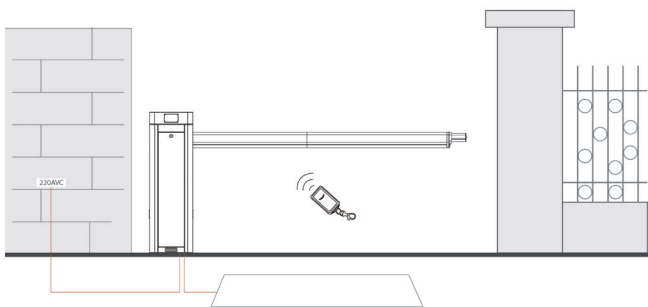

L: Cabinet on left side

R: Cabinet on right side



ZKTECO CO., LTD.
 www.zkteco.com
 E-mail: sales@zkteco.com

© Copyright 2017. ZKTECO CO., LTD. ZKTeco Logo is a registered trademark of ZKTECO CO., LTD. or a related company. All other products and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.