

BGM400 series barrier gate is driven by high-performance brushless DC motor, stable running, low noise, stable and reliable performance. The gate control system is rich in intefaces, widely used in all kinds of parking lot entrance and exit channel management.

Features



Highly energy-efficient because of the DC brushless motor



Delay automatic close



Digital control mainboard with diverse configuration possibilities



Manual rise and fall in case of absence of power



The barrier arm will rebound when an obstacle detected



Traffic light signal output



Reversible boom direction


[.	-ݣ-
L	

Failure warning


Specifications

BGM400L/R
1.5s to 6s
3m to 6m
Telescopic straight boom
DC 24V brushless motor
160W
10A
DC 24V
AC 220V/110V, 50Hz to 60Hz
2 million times
≤30m
-30℃ to 75℃
IP54
330*265*980mm
40kg

Dimensions (mm)

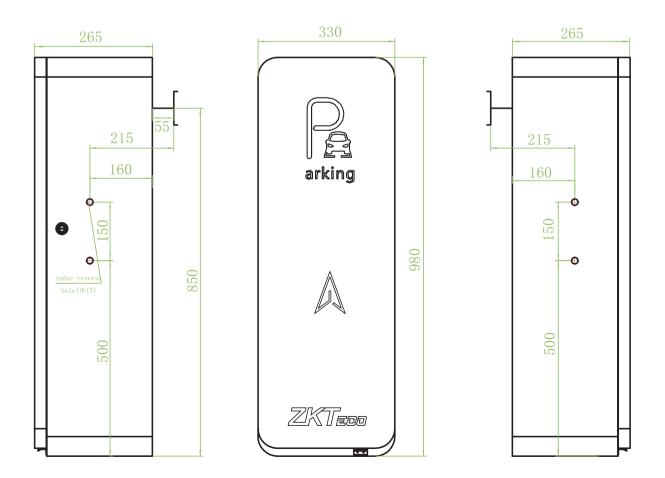

Directions

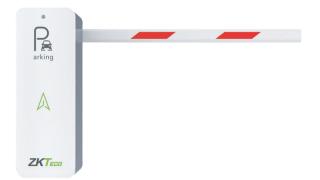



L:The chassis on the left, the boom on the right

R:The chassis on the right, the boom on the left

Related Products



